

VN-Plug EC




Plug fan with brushless EC motor.

If you are looking for a fan with a specific working point, please don't hesitate to contact us by phone +31 (0)416 391999 or email info@ventinet.nl and we will select the right fan for you.


Sizes	225 up to 1.120 mm
Motor (standard)	EC brushless motor 230/1/50 (up to 1.1 kW) or 400/3/50
Capacity	up to 60.000 m ³ /h
Pressure	up to 2.000 Pa
Control	0 – 10 Volt
Casing	Steel galvanized
Impeller	Steel coated
Extra	Construction with frame and compact fan up to size 630 Fan balanced conform G2.5 (ISO 1940). Delivery including EC controller
Accessories	Flexible connections / Flanges / Anti-vibration mounts / Drain / Shutters / Switches / Sound insulated cabins / Frequency converters

Additional information on request


Indication dimensions VN-Plug EC 225 – 630 (compact)

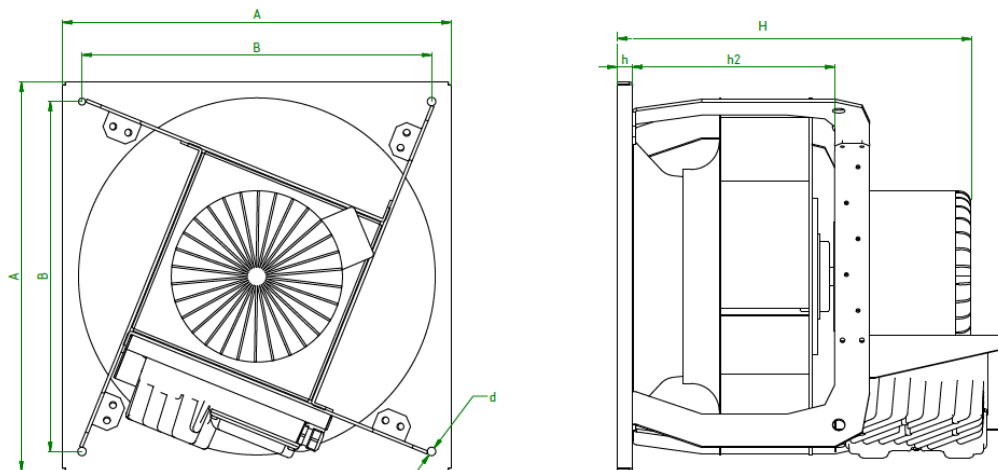

	A	B	d	h2	h	H
225	400	350	11	165	20	322
250	400	350	11	180	20	337
280	400	350	11	190	20	347 - 372
315	500	450	11	220	20	377 - 402
355	500	450	11	240	20	397 - 422
400	500	450	11	260	20	407 - 432
450	630	580	11	280	20	447 - 596
500	630	580	11	320	20	487 - 636
560	800	750	11	372	20	564 - 688
630	800	750	11	410	20	726 - 766

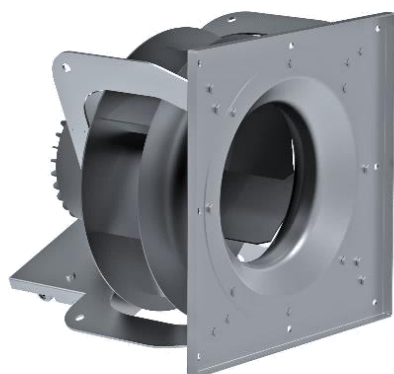

Indication dimensions VN-Plug EC 225 – 1120 (with frame)

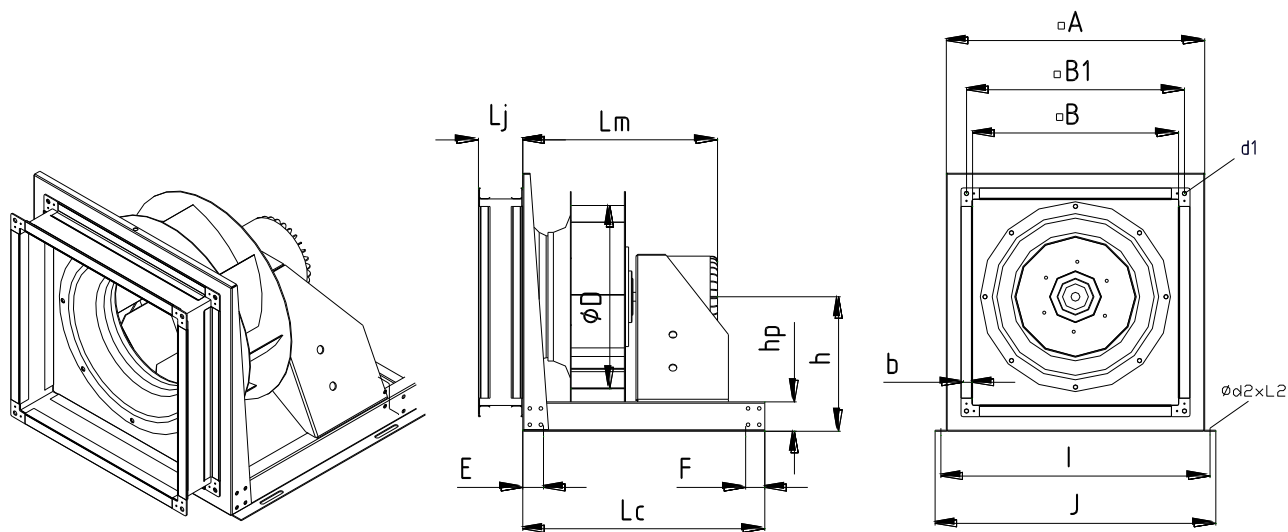

	A	B	B1	I	J	h	hp	E	F	Lj	Lc
225	330	250	270	345	360	165	20	80	100	120	320
250	360	280	300	375	390	180	20	80	100	120	320 – 345
280	400	315	335	415	430	203	20	80	100	120	360 – 385
315	460	355	375	478	495	243	30	80	100	120	400 – 425
355	500	400	420	518	535	260	30	80	100	120	400 – 425
400	560	450	470	580	610	285	30	80	100	120	430 – 500
450	630	500	530	660	690	325	30	105	105	120	430 – 455
500	710	590	530	730	760	365	40	125	125	120	430 – 550
560	750	630	660	780	810	380	40	125	125	120	550 – 690
630	850	710	740	895	935	440	40	125	125	120	585 – 800
710	950	800	830	995	1035	495	40	125	125	120	605 – 810
800	1050	900	930	1095	1135	535	60	125	120	120	765 – 880
900	1180	1000	1030	1225	1265	615	60	130	120	120	835 - 970
1000	1280	1120	1150	1325	1365	655	60	120	120	120	935 - 1100
1120	1450	1250	1280	1500	1550	760	80	120	120	120	1150

